


BOMAG

TOWED VIBRATORY ROLLERS BW 6, BW 6 S

PERFORMANCE DATA

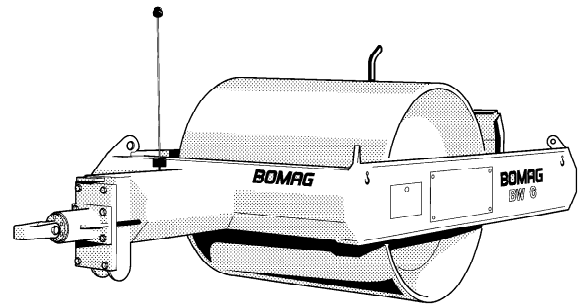

Machine type	Compaction output (m ³ /h)			
	Rock fill	Gravel, sand	mixed soil	Silt, clay
BW 6	470-940	360-720	270-540	180-360
BW 6 S	470-940	360-720	270-540	210-420

Machine type	Compacted layer thickness (m)			
	Rock fill	Gravel, sand	mixed soil	Silt, clay
BW 6	0,80	0,60	0,45	0,25
BW 6 S	0,80	0,60	0,45	0,30

BOMAG

Technical Data

Shipping dimensions in m3



BW 6 18,739
BW 6 S 19,048

Standard Equipment

- Electric starter
- Fuel level indicator
- Electric remote control for vibration
- Acoustic engine monitoring
 - V-belt
 - Generator
 - oil pressure
- Scrapers
- Hour meter
- Dry air filter
- Wheel chock

Optional Equipment

- Pad foot drum
- Special painting
- Towing hitch (NATO)
- Drum
(38 mm/+1000 kg)
- Tool kit

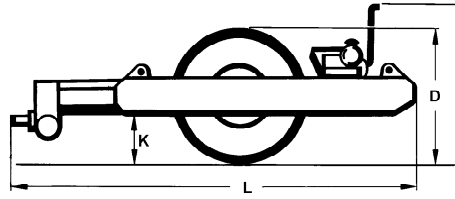

Dimensions in mm

	B	D	H	K	L	O1	O2	W
BW 6	2080	1500	1820	510	4950	190	190	1700
BW 6 S	2080	1380	1850	535	4950	190	190	1700

Technical Data

Weights

Grossweight	kg	6.050	6.950
Operating weight CECE	kg	5.876	6.776
Basic weight	kg	5.800	6.700
Static linear load CECE	kg/cm	34,6	

Dimensions

Projection angle, front	grad	9	9
Projection angle, rear	grad	16	16
Permitted inclination, front	grad	30	30
Permitted inclination, rear	grad	40	40
Tipping angle, left-right	grad	25	25

Drive

Engine manufacturer		Deutz	Deutz
Type		F3L912	F3L912
Cooling		air	air
Number of cylinders		3	3
Performance ISO 3046	kW	37	37
Performance SAE J 1995	hp	50	50
Speed	min-1	2.300	2.300
Fuel		diesel	diesel
Air cleaner		dry	dry

Drums

Height of pad feet	mm		100
Area of one pad foot	cm2		136
Number of pad feet			96

Exciter system

Drive system		mech.	mech.
Frequency (1)	Hz	28	28
Amplitude (1)	mm	1,53	1,19
Centrifugal force 1	kN	118	118
Centrifugal force 1	t	12	12

Electric equipment

Electric equipment	V	12	12
Generator	V	DC	DC
Battery - Voltage/capacity	V/Ah	12/143	12/143


Towing hitch

Bore diameter	mm	45,5	45,5
Thickness of hitch	mm	60	60

Capacities

Fuel	l	90	90
------	---	----	----

Technical modifications reserved. Machines may be shown with options.



BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090
 Fax (0)6742 - 3090

BOMAG